


## mox ceiling


### instructions for use

1. Check mains connection, if disconnected.
2. Unscrew ceiling bracket off the luminaire.
3. Conduct mains cable through cable entry point of the ceiling bracket. Conduct aperture in cable entry point in such a way that density is assured.
4. Attach ceiling bracket. Use the washer gaskets with rubberized face showing to the ceiling bracket. At mounting holes which are not used arrange for density.
5. Hustle silicone-tubes over the power lines.
6. Establish protective conductor connection and conduct electrical junction.
7. Mount light housing back onto ceiling bracket and screw it on.

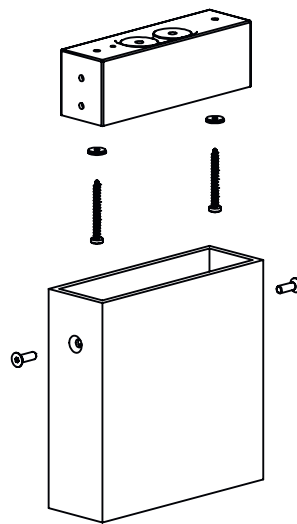

### light technology:

IvyLight-technology  
230V Power LED / 3000K  
10,3 W/840 lm


 EEC

### technical information:

operating voltage 230V / 50Hz

 protection class

 safety class 1

 Luminaire is suitable for mounting on normal inflammable fixing surfaces.

 conformity mark

### maintenance:

Disconnect the electrical installation.

Check gaskets and clean or replace them if necessary.

This luminaire contains built-in LED lamps. The lamps cannot be replaced in the luminaire.

### care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning.

Please note care instructions at [www.IP44.de](http://www.IP44.de).

See service documents:

Care of anodized aluminium.

### safety:

We point out that the electric connection of light fixtures has to be done by a certified installer.

We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire. Modifications on the luminaire will result in loss of warranty.

**Please keep the instructions with the service documents!**