


## piek

### instructions for use

#### For unpaved beds and greens

1. Stick ground spike in the ground.
2. Provide the electrical connection between safety plug and grounded electrical socket **aboveground**.
3. Optionally fix mains cable in the ground spike.
4. Grounded electrical sockets have to correspond to the essential protection class.
5. The safety plug signals the movability of the luminaire.  
Please note, that a fixed installation and/or a connection with an earth-joint is not permitted.

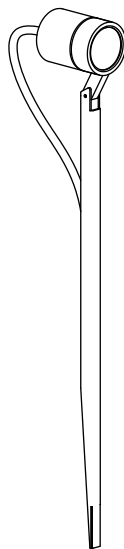

#### light technology:

IvyLight-technology  
230V Power LED / 3000K  
system performance: 4 W/320 lm



#### technical information:

operating voltage 230V / 50Hz

supply cable H05RN-F 3G0,75



protection class



safety class 1



Luminaire is suitable for mounting on normal inflammable fixing surfaces.



conformity mark

#### maintenance:

Disconnect the electrical installation.

This luminaire contains built-in LED lamps. The lamps cannot be replaced in the luminaire.

#### dimming:

The luminaire can be dimmed with an approved leading- or trailing edge dimmer. Please contact IP44.de service center for a list of approved dimmers.

#### care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning.

Please note care instructions at [www.IP44.de](http://www.IP44.de).

See service documents:

Head: Care of anodized aluminium.

Pole: Care of stainless steel rustless.

#### safety:

We point out that the electric connection of light fixtures has to be done by a certified installer.

We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire.

Modifications on the luminaire will result in loss of warranty.

#### assembly instruction:

The luminaire may not come into contact with highly acidic or alkaline soils, or with other aggressive substances, chemicals, fertilizers or bark mulch.

**Please keep the instructions with the service documents!**